



# Vertical Shaft Impact Crusher Model 250



## PRODUCER BENEFITS

- Cubical particle shape
- Gradation control
- Simple maintenance
- High product yield
- Non-plugging crushing chamber
- High fracture percentage
- Variable reduction ratios
- Heavy duty design

PARAMETERS	MODEL 250
Maximum Feed Size Longest Dimensions	3.5"/88.9 mm
Maximum Input Capacity T.P.H. Depending on Feed Size	250
Maximum Impeller R.P.M. Depending on Feed Size and Internal Configuration	1500
Table Diameter	32"/813 mm



Steel on steel  
configuration for  
max production

Autogenous rock  
box for lower ton-  
nage in high abra-  
sion materials






### STANDARD FEATURES

- Hydraulic lid lifter
- Modular oil lube system
- Externally adjustable feed tube system
- Unitized construction
- Cast lid and tunnel liners
- One piece tub and shroud liners
- Motor mount and adjustable take-ups
- V-belt drive
- Heavy duty pedestal drive with double self-aligning spherical roller bearings
- 3, 4, 5 and 6-Shoe tables
- One year manufacturers warranty
- Options include dust control systems, jib crane (parts hoist), portable or stationary, electric or diesel drives.

**ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE**

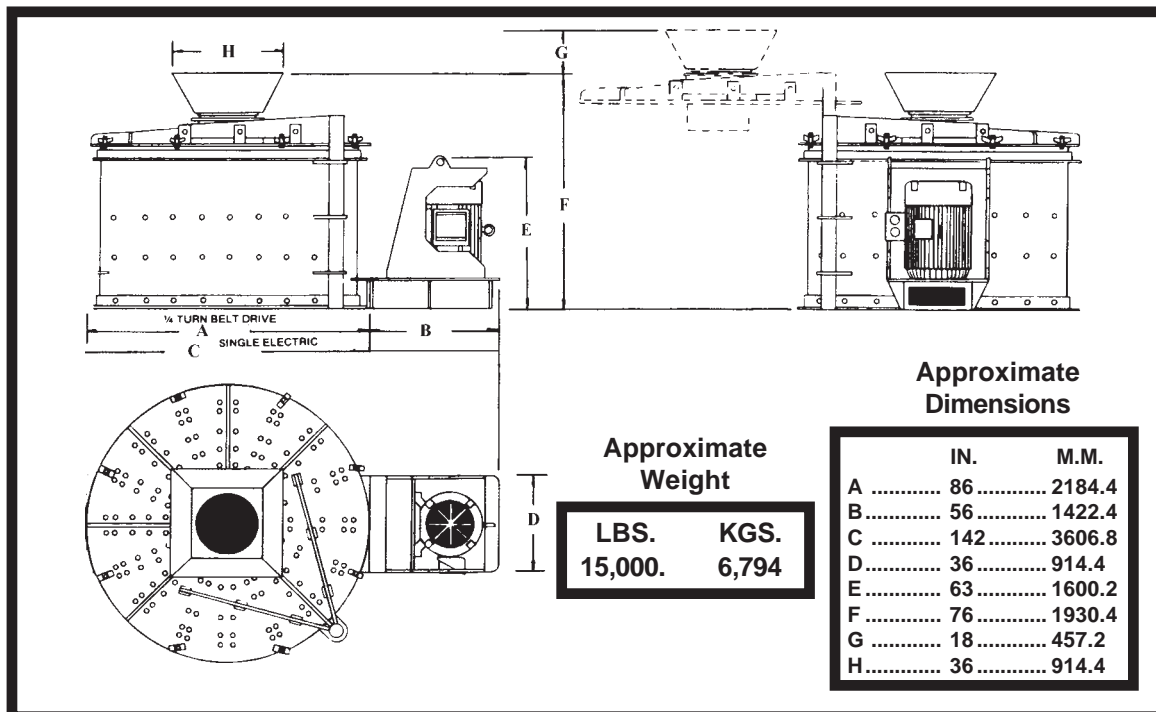

## ACTECH INC.

10517 NE 50th Ave • Vancouver, Wa 98686

Phone: (360)571-7703 • Fax: (360)571-7704

Email: [sales@actechmfg.com](mailto:sales@actechmfg.com) • Web: [www.actechmfg.com](http://www.actechmfg.com)