

VERTICAL SHAFT
IMPACT CRUSHER
MODEL V300

PORTABLE VSI CRUSHER



- 400 TPH
- 4" Feed Size
- Actech V300 Portable VSI Crusher
- 400HP Electric Motor with Variable Frequency Drive (VFD)
- Highway or Ocean Transportable
- Onboard Switchgear and Wiring Included
- All Necessary Guarding Included
- Available in Shoe and Anvil OR Rock-on-Rock Configurations


PARAMETERS	MODEL 300
Maximum Feed Size Longest Dimensions	4"
Maximum Input Capacity T.P.H. Depending on Feed Size	400
Maximum Impeller R.P.M. Depending on Feed Size and Internal Configuration	1300
Table Diameter	40"

PRODUCER BENEFITS

- HIGH PRODUCT YIELD
- GRADATION CONTROL
- NON-PLUGGING CRUSHING CHAMBER
- HEAVY DUTY DESIGN
- SIMPLE MAINTENANCE
- HIGH FRACTURE PERCENTAGE
- VARIABLE REDUCTION RATIOS
- CUBICAL PARTICLE SHAPE



STEEL ON STEEL
CONFIGURATION FOR
MAX PRODUCTION

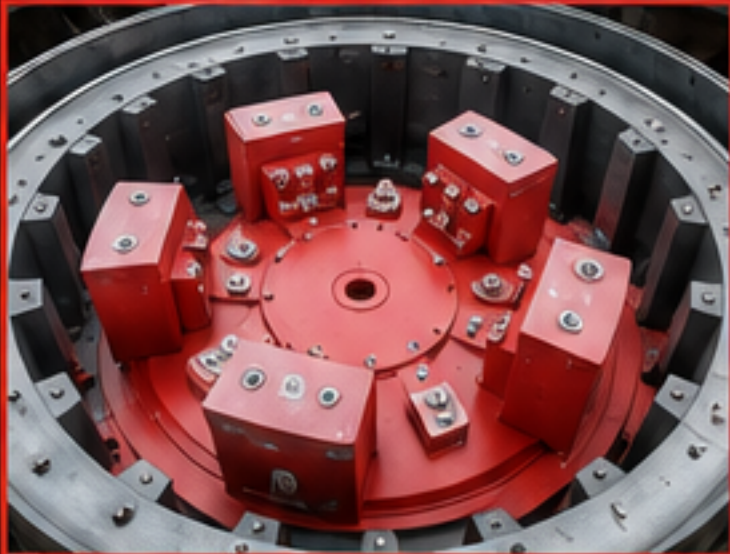


AUTOGENOUS ROCK
BOX FOR LOWER TONNAGE
IN HIGH ABRASION MATERIALS



STANDARD FEATURES

- V-belt drive
- Hydraulically adjustable feed tube system
- Cast lid, tub and tunnel liners
- Cast shroud liners
- Motor mount and adjustable take-ups
- Unitized construction
- Modular oil lube system
- Heavy duty pedestal drive with double self-aligning spherical roller bearings
- 3, 4, 5 and 6-Shoe tables
- Two year manufacturers warranty
- Rotor/Rock Box options
- Hydraulic lid lifter and feed tube
- Hydraulic Jacking Leg with Power Unit
- 400HP Electric Motor and VFD Drive Panel
- Catwalks and Handrails around crusher
- United or Segmented Anvils

DIMENSIONS & WEIGHT

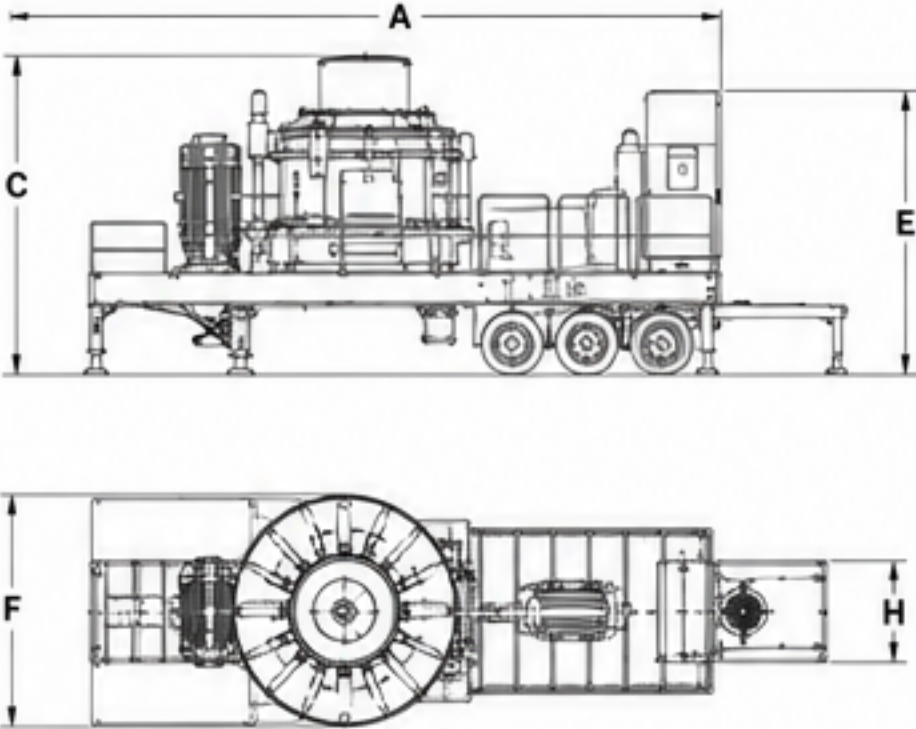

APPROXIMATE WEIGHT	LBS.	KGS.
	8,250	3,855

APPROXIMATE DIMENSIONS

	IN.	M.M.
A	61	1778
B	39	1016
C	100	2286
D	29	660
E	48	965
F	64	1651
G	10	558
H	14	457

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE



Scale Axle Wts:

10,100 lb
Steer

36,940 lb
Drive

28,320 lb
Rear

20,000 lb
Truck

Approx
Total Wt:
54,532 lb