

VERTICAL SHAFT IMPACT CRUSHER MODEL V75

Engineered for high performance
and superior cubical products.



PRODUCER BENEFITS



CUBICAL
PARTICLE SHAPE



GRADATION
CONTROL



SIMPLE
MAINTENANCE



NON-PLUGGING
CRUSHING CHAMBER




HEAVY DUTY
DESIGN



HIGH PRODUCT
YIELD



HIGH FRACTURE
PERCENTAGE



VARIABLE
REDUCTION RATIOS



PARAMETERS

MODEL 75

Maximum Feed Size Longest Dimensions	1-1/2" / 38 mm
Maximum Input Capacity T.P.H. Depending on Feed Size	75
Maximum Impeller R.P.M. Depending on Feed Size and Internal Configuration	2600
Table Diameter	18" / 457 mm

1-360-571-7703

sales@actechmfg.com

actechmfg.com


STANDARD FEATURES

- V-belt drive
- 3, 4, and 5-Shoe tables
- Options include dust control systems, jib crane (parts hoist), portable or stationary, electric or diesel drives
- Hydraulic Lid Lifter
- Motor mount and adjustable take-ups
- Cast lid and tunnel liners
- Externally adjustable feed tube system
- Unitized construction
- Heavy duty pedestal drive with double self-aligning spherical roller bearings
- One year manufacturers warranty
- Modular oil lube system

OPTIONAL FEATURES

- One piece tub and shroud liners

DIMENSIONS & WEIGHT

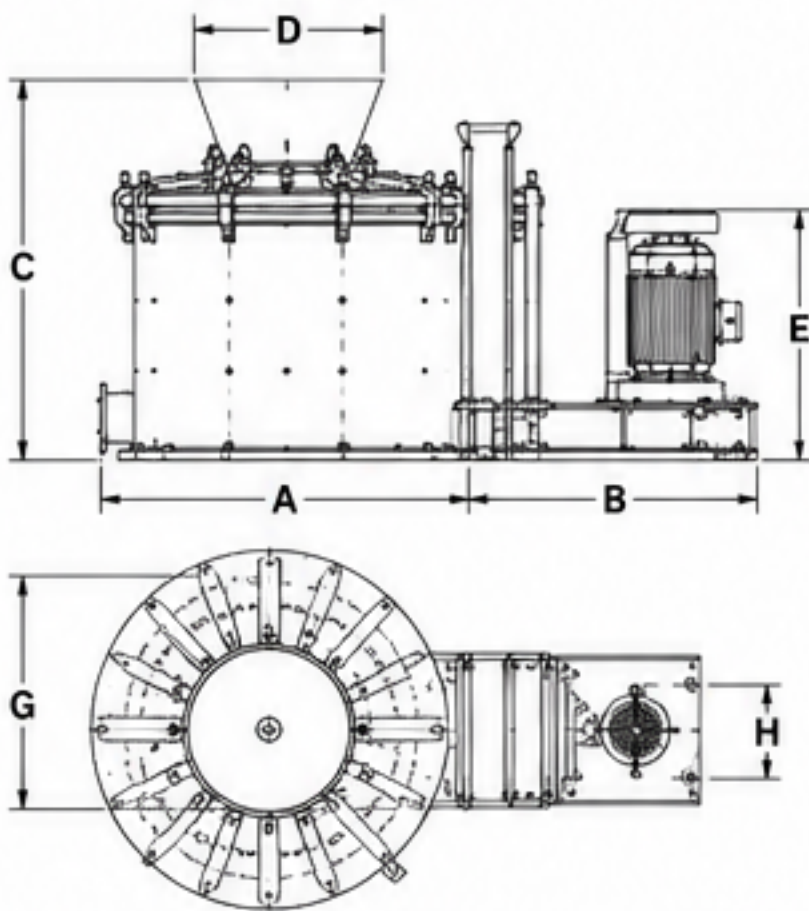

APPROXIMATE
WEIGHT

LBS.

8,250

KGS.

3,855

APPROXIMATE DIMENSIONS

	IN.	M.M.
A	61	1778
B	39	1016
C	100	2286
D	29	660
E	48	965
F	64	1651
G	10	558
H	14	457

ALL SPECIFICATIONS ARE SUBJECT
TO CHANGE WITHOUT NOTICE

1-360-571-7703

sales@actechmfg.com

actechmfg.com