

V350 - V650 VERTICAL SHAFT IMPACT CRUSHER'S



PRODUCER BENEFITS



CUBICAL
PARTICLE SHAPE



GRADATION
CONTROL



SIMPLE
MAINTENANCE



HIGH
PRODUCT YIELD



NON-PLUGGING
CRUSHING CHAMBER



VARIABLE
REDUCTION RATIOS



HIGH FRACTURE
PERCENTAGE




HEAVY DUTY
DESIGN


MODEL #	FEED TUBE I.D.	TABLE DIA.	MAX FEED SIZE	MAX TPH	MAX RPM	APPROX. WGT.
350	14"	38"	4"	350	1400	32,000
450	14"	43"	4"	450	1200	36,000
450XC	16"	43"	8"	450	1000	38,000
550	16"	43"	4"	550	1200	40,000
550XC	18"	43"	8"	550	1000	41,000
650	18"	46"	6"	650	1000	43,000
650XC	24"	46"	8"	650	800	46,000

STANDARD FEATURES

- ✓ Hydraulic lid lifter
- ✓ Modular oil lube system
- ✓ Externally adjustable feed tube system
- ✓ Unitized construction
- ✓ Cast lid and tunnel liners
- ✓ One piece tub and shroud liners
- ✓ Motor mount and adjustable take-ups
- ✓ V-belt drive
- ✓ Heavy duty pedestal drive with double self-aligning spherical roller bearings
- ✓ 3, 4, 5 and 6-Shoe tables
- ✓ One year manufacturers warranty
- ✓ Options include dust control systems, jib crane (parts hoist), portable or stationary, electric or diesel drives

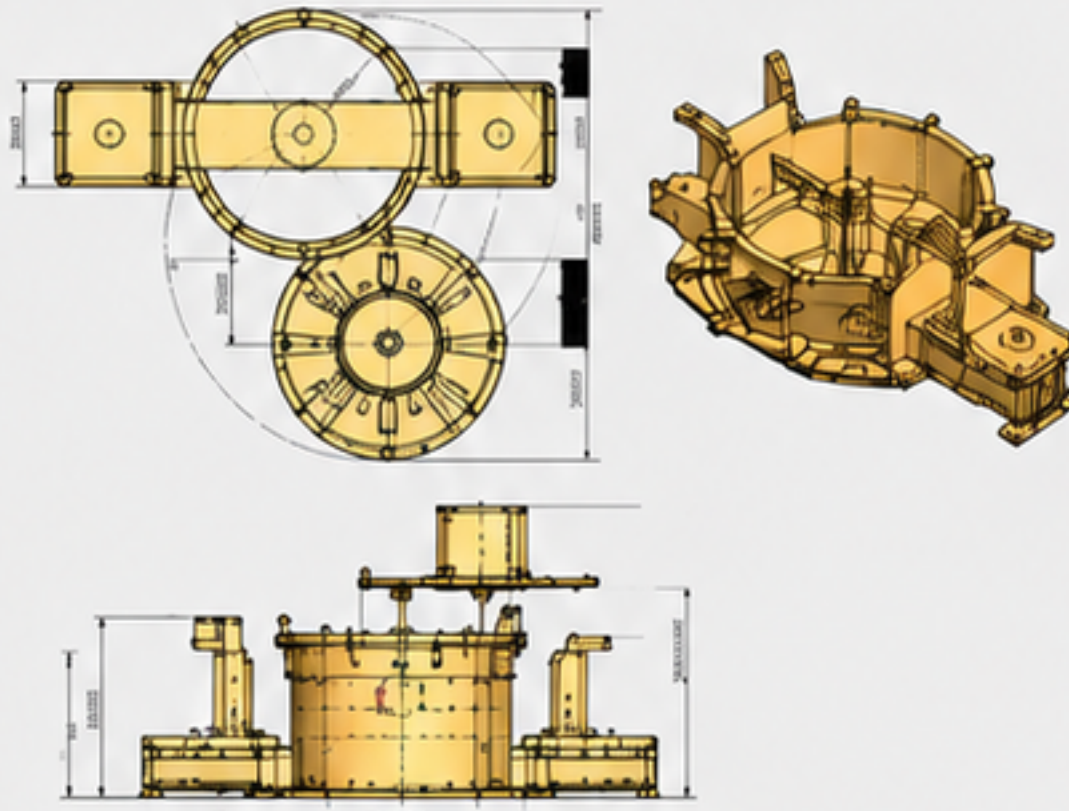

ALL SPECIFICATIONS ARE SUBJECT TO
CHANGE WITHOUT NOTICE

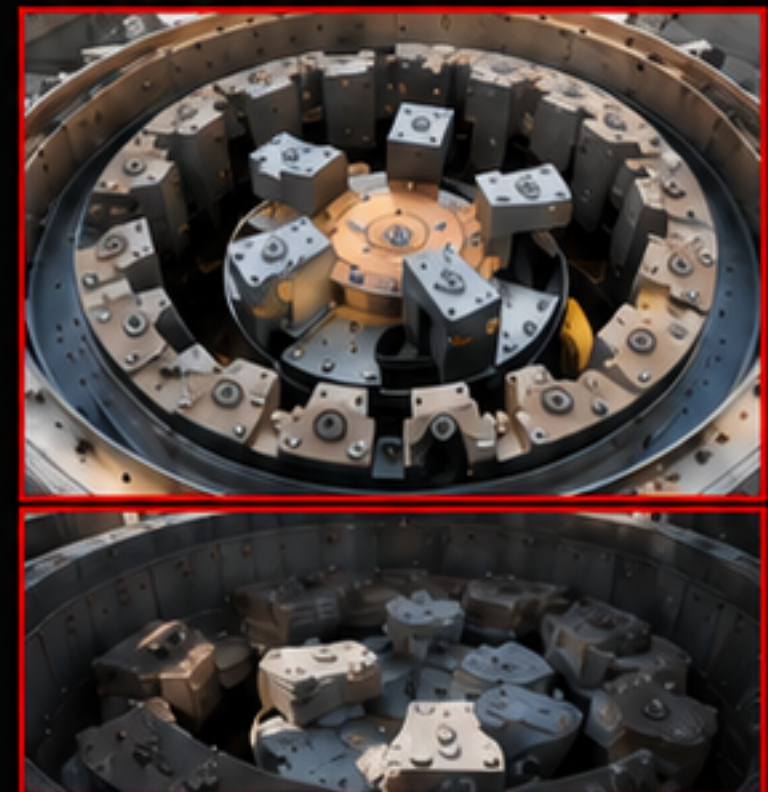

VARIABLE INTERNAL CONFIGURATIONS
installed to match each application
or to match your existing V.S.I.



1-360-571-7703



sales@actechmfg.com



actechmfg.com